



Digital Video Indoor Monitor


Quick user guide

RoHS



● Indoor Monitor Overview


1.1 Schematic plan view

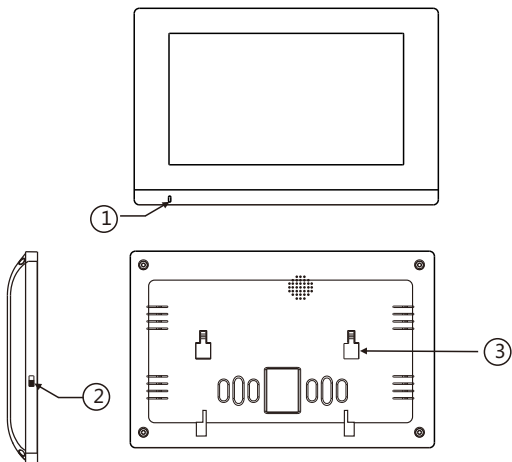

Function Description		
① microphone	② power	③ bracket position


Technical Parameters			
Operating Voltage	DC 13-17V(G2) DC 15-24V (G2.2)	Operating temperature	-20-55℃
Standby Current	230mA	Standby power consumption	3W
Working current	320mA	Talk mode	dual

1.2 Installation steps


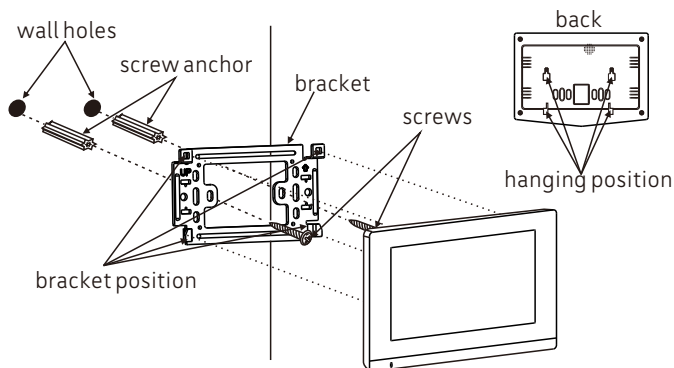


Mark installation position → Insert anchor → Fix bracket → Aim and hang

● Wiring diagram

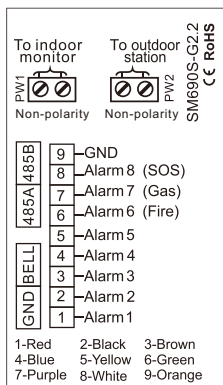


● System diagram

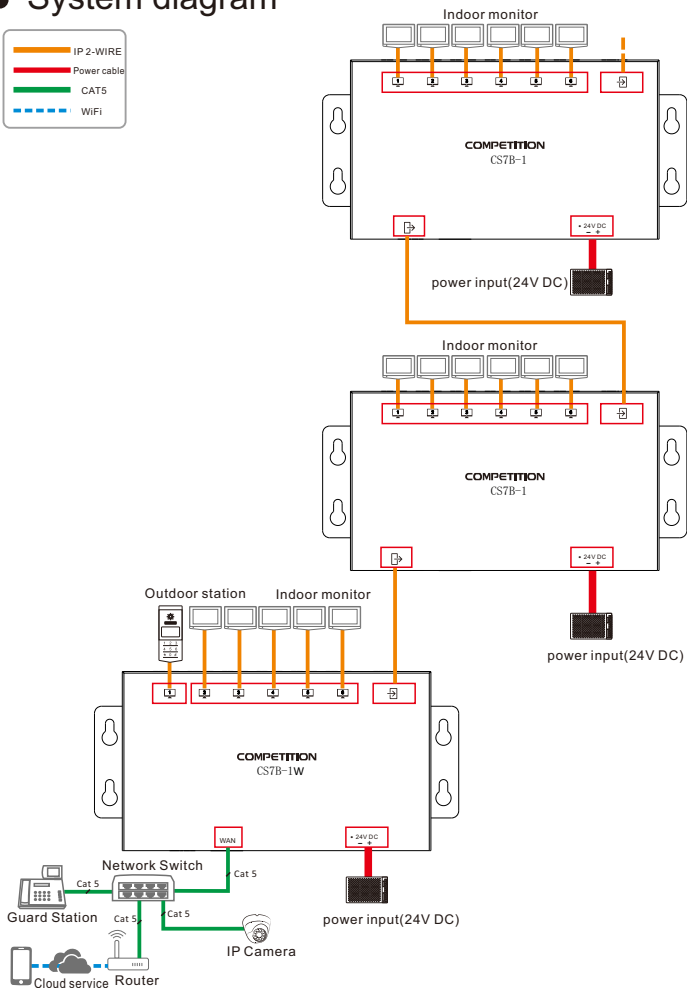

- Indoor Monitor operating instructions


2.1 Main interface

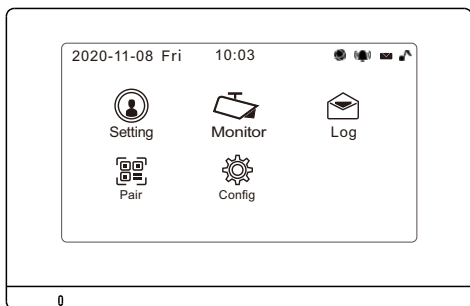


Status prompt	Gray icon
 The internet	Network Issue
 Alarm	No alarm information
 Message	No message
 Ringtone	Do Not Disturb mode

2.2 User Settings

1


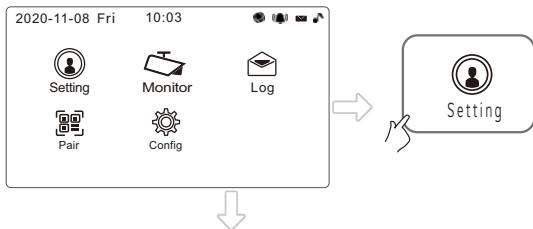


2

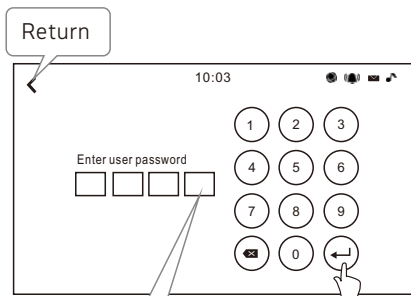


Enter the 4-digit password
default password: 1234

3

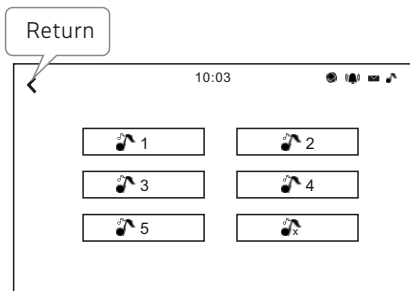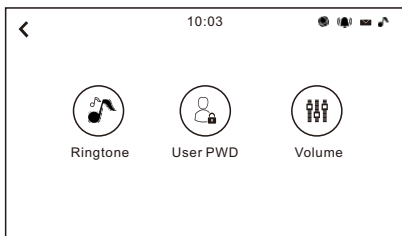


Choose your favorite ringtones

4

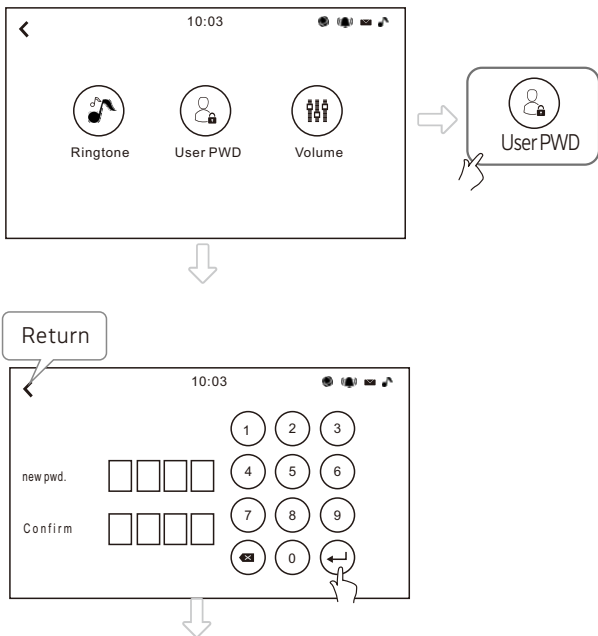


Enter the 4-digit password, you can reset a new password

5



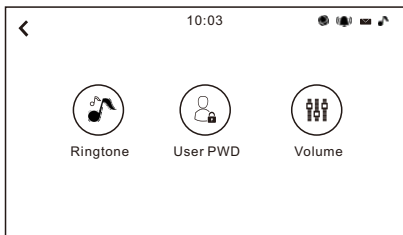


Return

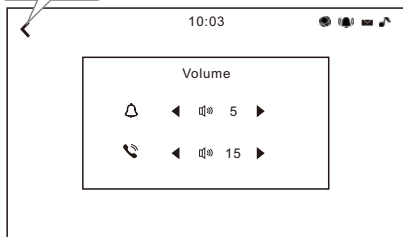


Choose your favorite ringtone and volume

2.3 Monitor

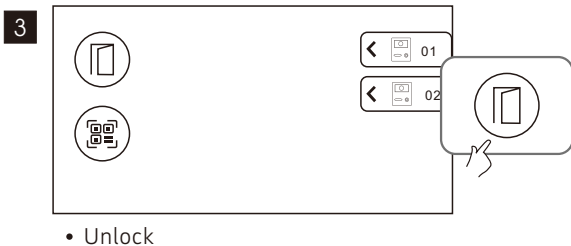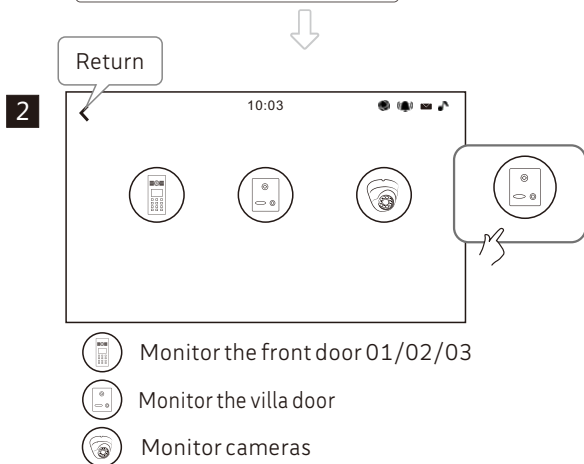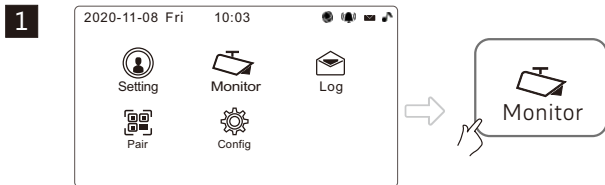


4

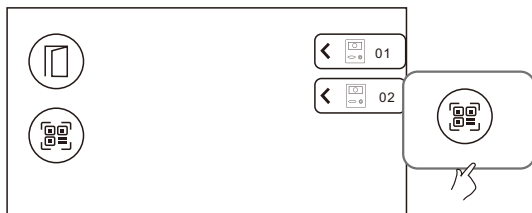


Display the QR code of the outdoor station


5

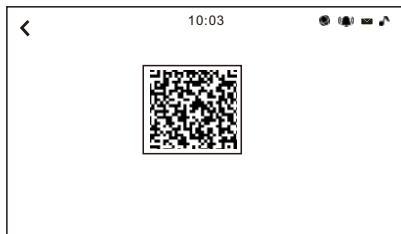

Install CCL-SH APP on your phone, click on the main interface "Bind Device", scan the QR code of the outdoor station to bind the device.




CCL-SHAPP



QR code on the back of the outdoor station




2.4 Log

1

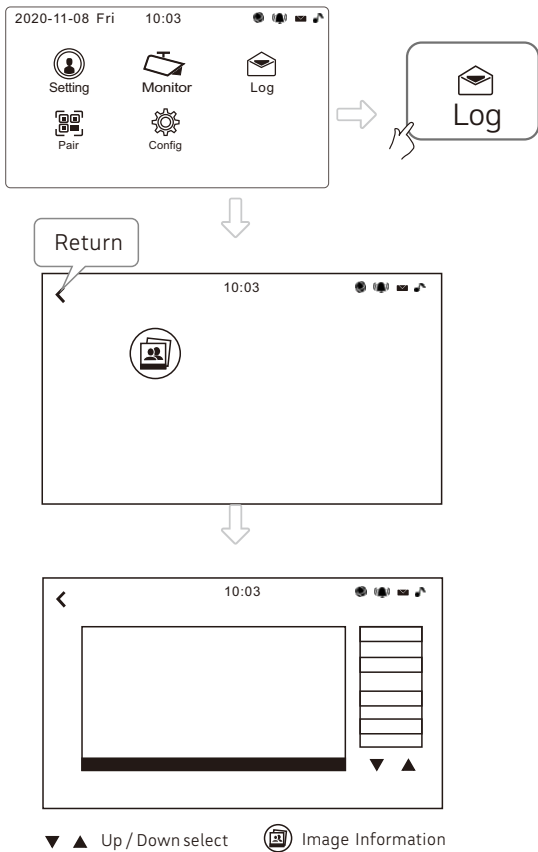




2.5 Config





1


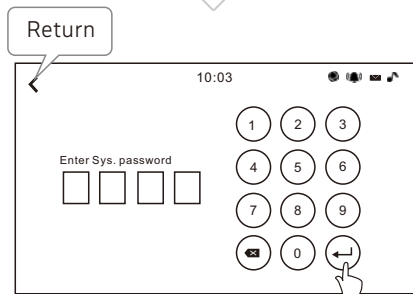

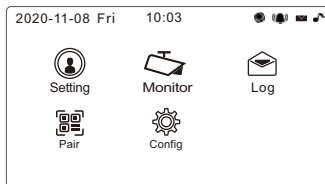






For project operation only.
Default password: 6666




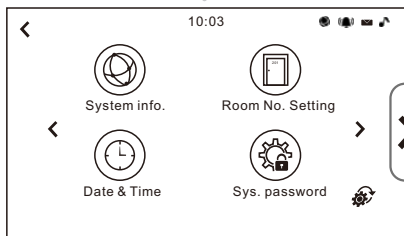


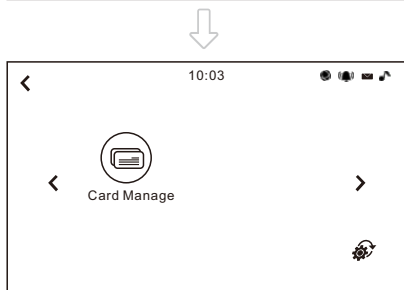
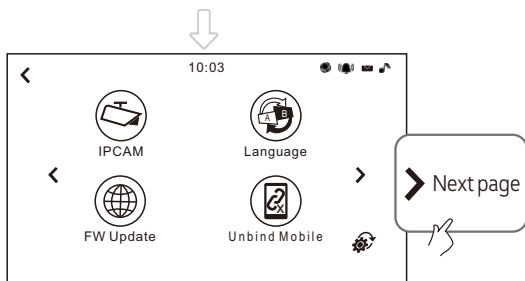


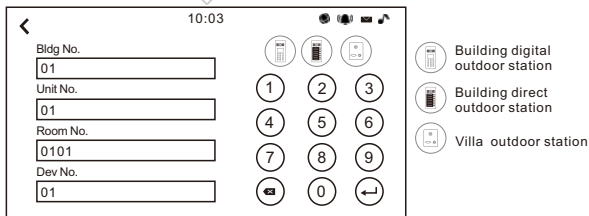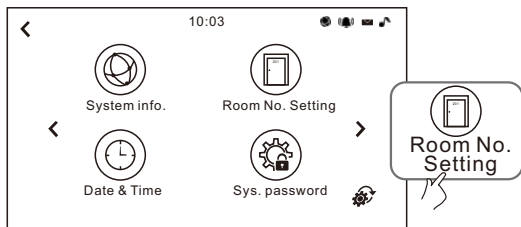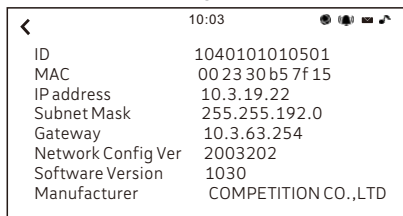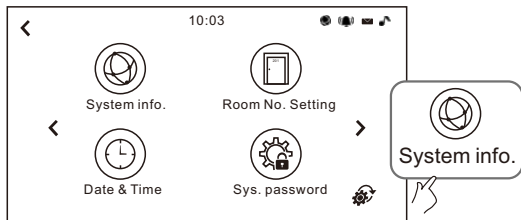

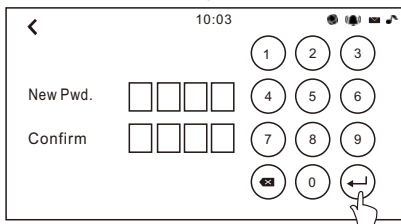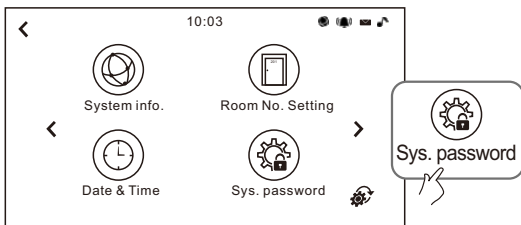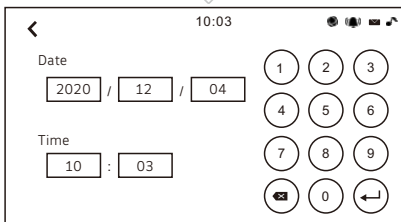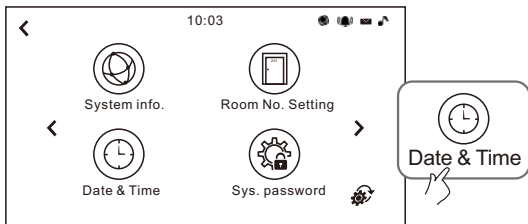

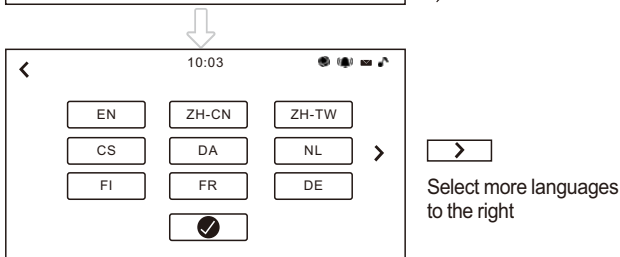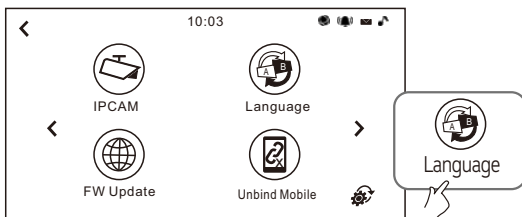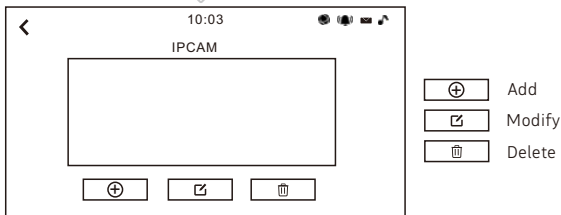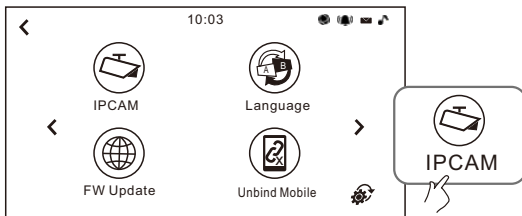

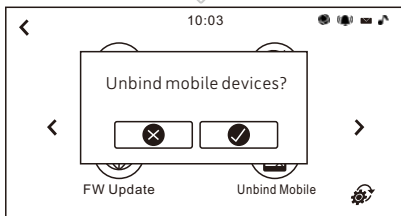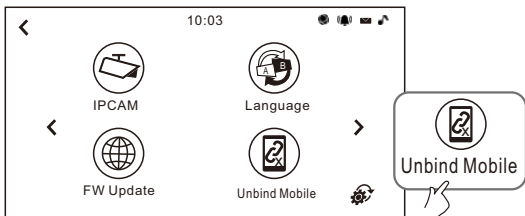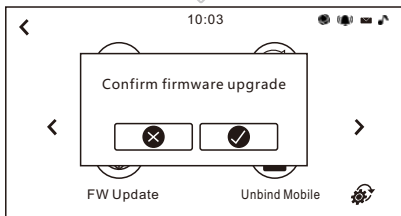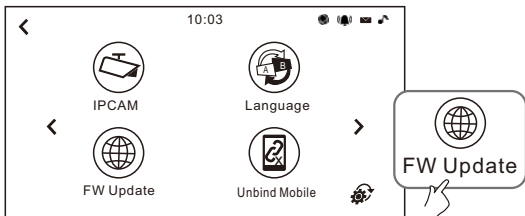

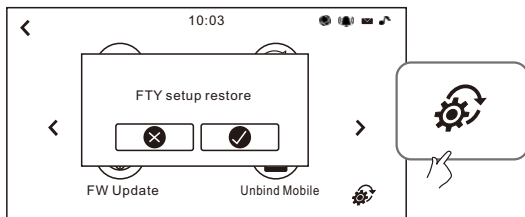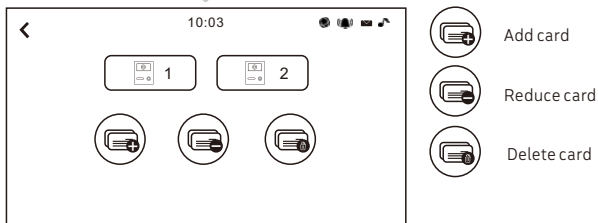

● Network settings

Set the IP of the router's LAN port to: 10.3.63.254

The subnet mask is set to: 255.255.192

● Mobile App Operation

① APP Download



Android



iOS

1. Scan the QR code to download.


Or Android: Search "CCL-SH APP" from Google Play;

iOS: Search and download "CCL-SH APP" from Apple Store.

2. Android running 6.0 and above.

3. iOS running version 9.0 and above.

② Apply to sign up a new account

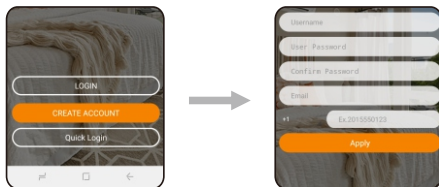


- Open CCL-SH APP, sign up a new account, fill out the basic information to complete the registration.

③ Login



- Sign up finished, log in APP, enter the main interface.

④ Binding outdoor station

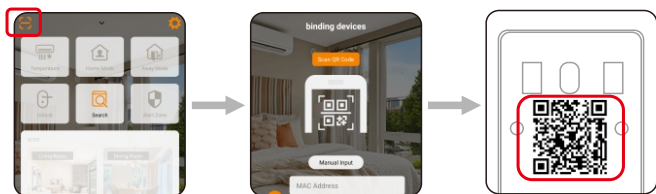

CCL-SHAPP

QR code on the back of
the outdoor station

- Click the Bind Device button, Scan the QR code on the back of the outdoor station to bind the device or manually enter the mac address and activation code to bind the outdoor station.